




30, 60 AND 75 W SWITCHED MODE POWER SUPPLIES

30S5	5 - 6 V	6 A	30S15-15	2 x 12-15 V	1.1 A
60S5	5 - 6 V	12 A	75S15-15	2 x 12-15 V	2.5 A

The independent sense circuit permits to connect the 2 outputs of the 30S15-15 and 75S15-15 **parallel, series** or **isolated** for use as:

		30S15-15	75S15-15	
Single output	12 to 15 V	2.2 A	5 A	The 2 outputs may be loaded asymmetrically up to 1.3 A (30S15-15) resp. 3 A (75S15-15). Overloading or shorting causes no damage.
Single output	24 to 30 V	1.1 A	2.5 A	
Dual output	+ and - 12 to 15 V	1.1 A	2.5 A	
Two outputs	each 12 to 15 V	1.1 A	2.5 A	

The very large input voltage range allows **worldwide** use on 110-115-125-220-230-240V 50-400Hz line voltages and even on 240 to 365 VDC.

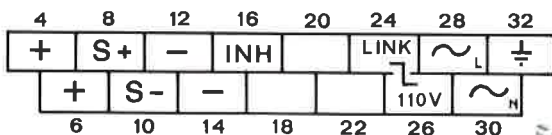

Connections can be made directly on to the power supply with faston receptacles 4.8x0.8mm or on to the H15 mating connector which is available in 3 versions.



Adapter PA1 for panel mounting

Input voltage

176 - 265V AC 50-400Hz
or 240 - 365V DC

with link on connector
93 - 135V AC 50-400Hz

Voltage regulation

15 mV for 0-100% load variation
15 mV for 176-265V line variation

Above load regulation applies when connected as a single output power supply.

If used as a dual or as a master and slave see curves on next page.

Ripple + noise (incl. spikes)

20 mV on 5 V output
30 mV on 15 V output
60 mV on 30 V output

Transient response

Load change 10 to 100%

Max. deviation 0.5 V (0.25 V on 30S)
Recovery time 0.5 mS

Temp. coeff. of output voltage

0.02% per °C

Efficiency

Typically 77% at 5V to 81% at 12-30V at full load and 220V AC input.
Input current at no load is only 30 mA.

Overvoltage protection

Internal SCR crowbar OVP, set to operate at approximately 7V on 5V models and 18V on 15V models or 36V when used in series mode.

Hold-up time

40 mS at full load and 220V AC input.

Temperature range

-10 to +50 °C at 100% output current.
Derate current linearly to 20% at 75 °C.

Remote sensing



Fitted on all models

Led lamp

Led lamp on front end indicates output state.

Overload protection

Constant current limit.

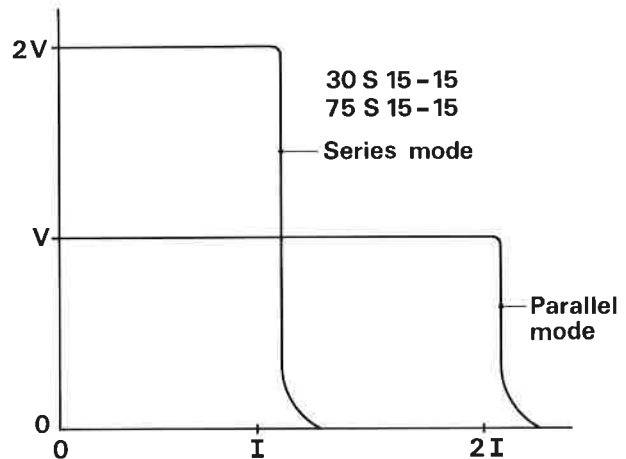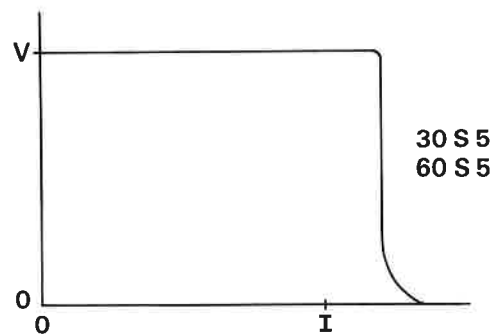

Inhibit

A logic 1 (+5V) between INH (pin 16) and S- (pin 10) shuts down the output.

Series operation

Up to 250V combined output.

Parallel operation

Units may be connected in parallel. To protect the internal fixed overvoltage protector, an external crowbar type OVP, set to 110%, can be connected across the load.

RFI suppression

Conducted interference complies with VDE 0875 curve N-12db on input and curve N on output.

Insulation



2.5kVACRMS (1 min.) input to output and input to case. 500VDC output to case.

Insulation resistance better than 50 MOhm (measured at 500VDC).

Safety in accordance with IEC 348.

Weight

30 S models 0.75 kgs, 60 and 75S 1.2 kgs.




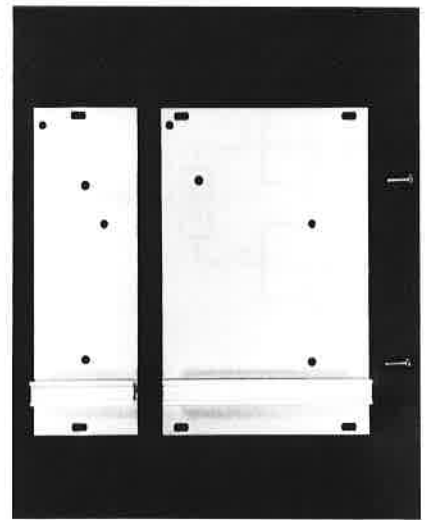
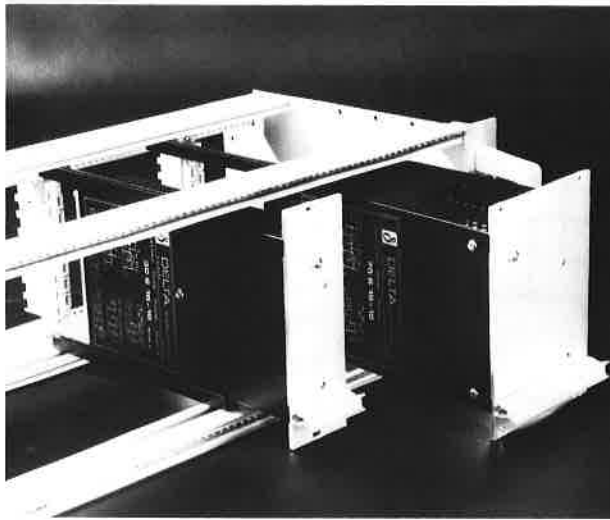


Coding strip and pin. To be ordered separately.

Dimensions are according to DIN 41494 to fit into a Eurocard Rack. A mating connector H15 with faston tabs is supplied with each power supply.


Front panels 8 TE and 16 TE. To be ordered separately.

The coding system can be used to prevent incorrect insertion of dissimilar units into the rack. Two of the three holes have to be covered by screws.

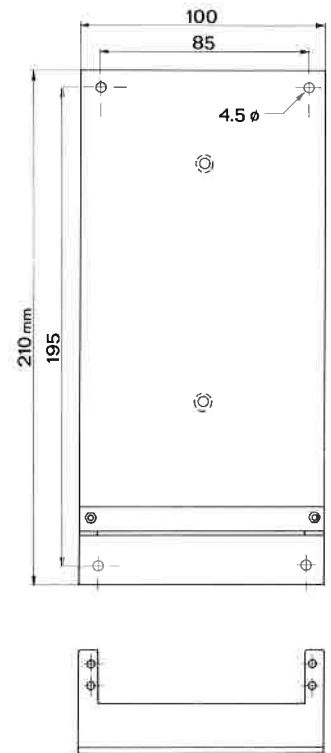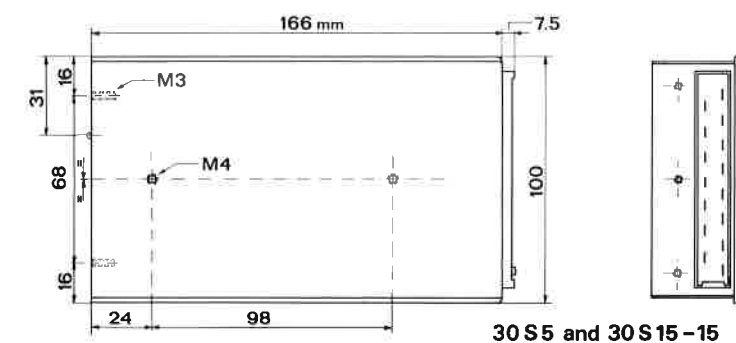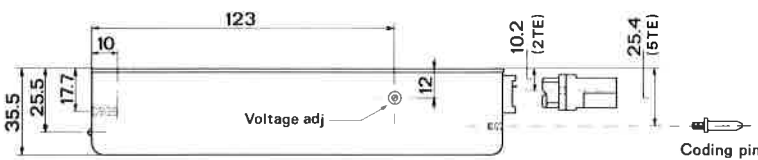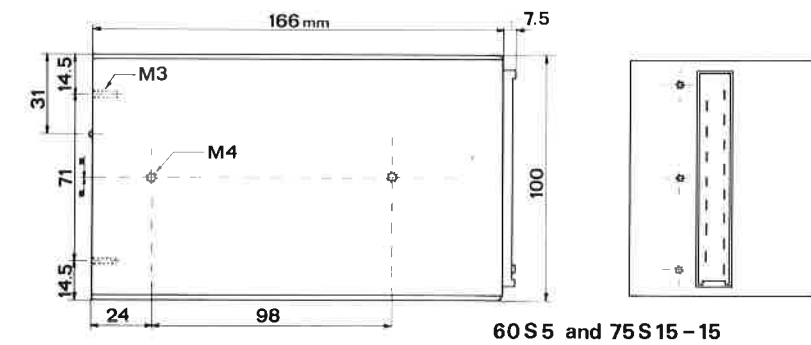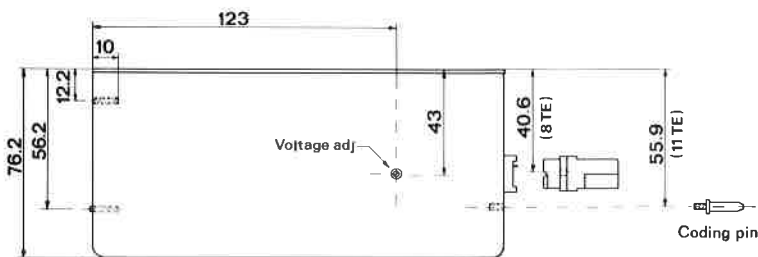


Adapter PA1 for panel mounting of 30, 60 and 75 S models

30S15-15 and 75S15-15 can be used in 4 different modes:



Parallel mode

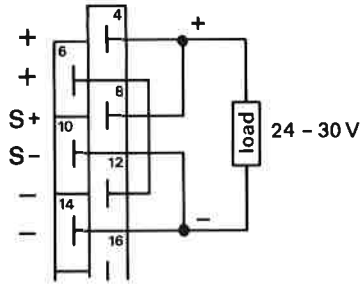



Series mode

Parallel and series mode

Turn the voltage adjustment about 15 turns up if previously used in parallel mode or down if previously used in series mode. The OVP will trip if the voltage adj. potentiometer is in a too high turned up position.



External voltage adjustment

Is possible with a variable resistor between S+ and +, with the internal adj. at zero.

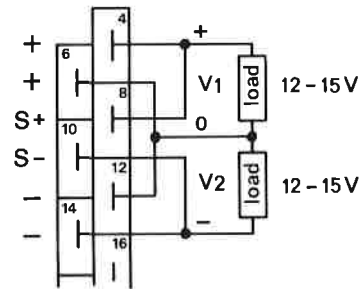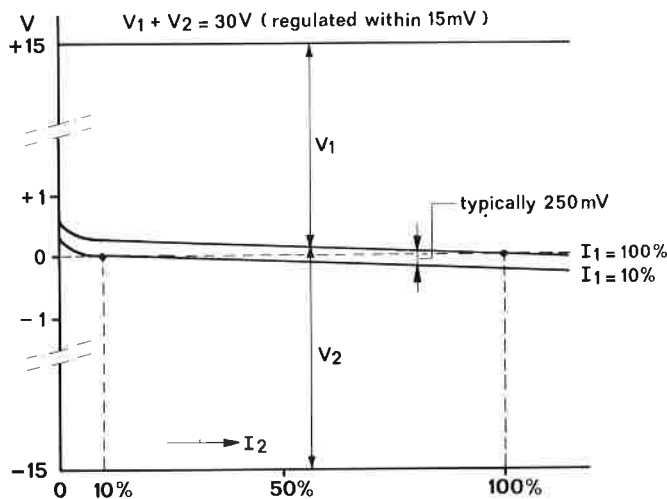


Dual mode (Sensing on $V_1 + V_2$)

The total voltage $V_1 + V_2$ is regulated within 15 mV. Unequal loading of the + and - output causes a slight shift of the zero point.

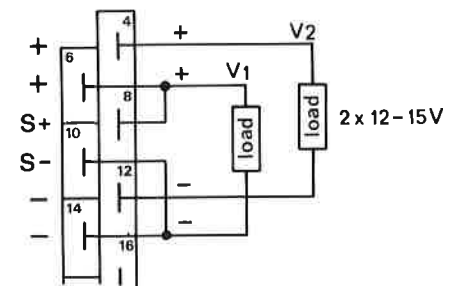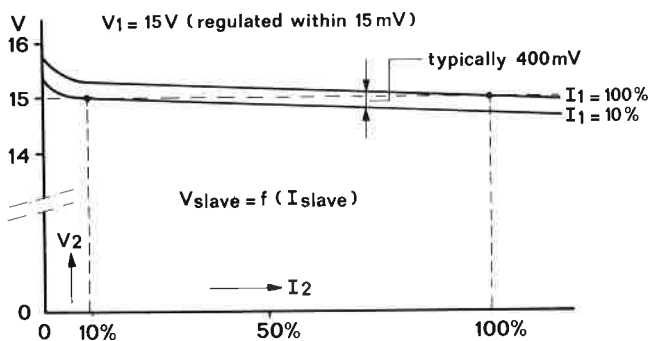

Master and slave mode (Sensing on V_1)

Two isolated outputs (max. 100VDC between V_1 and V_2). The master output voltage is regulated within 15mV. The slave output varies slightly when the two outputs are loaded unequally.

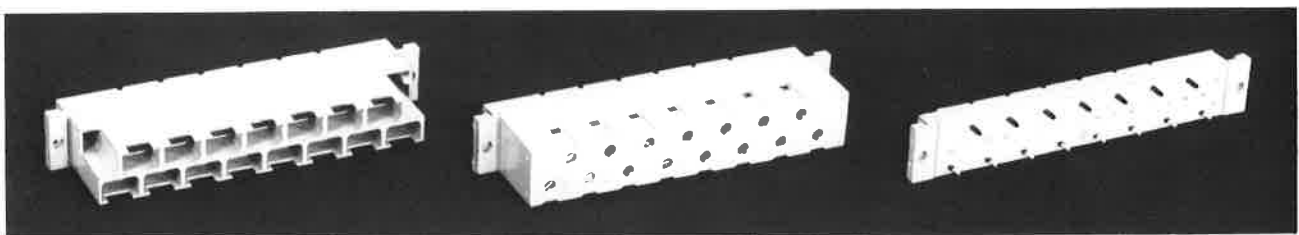

H15 with faston tabs 6.3 x 0.8 mm

with screw terminals

with solder pins

The H15 mating connector (DIN 41612) is available in the above mentioned 3 versions.

R = Ohm

- 1 = 16 25 °C
(Keystone RL 450-10-73-S48)
- 2 = 150 k MK3
- 3 = -
- 4 = 150 k MK3
- 5 = -
- 6 = 8,2
- 7 = 47
- 8 = 1 k
- 9 = 1 k
- 10 = 1 k
- 11 = 10 k
- 12 = 10 k
- 13 = 10 k
- 14 = 10 k
- 15 = 12 k
- 16 = 33 k
- 17 = 15 k
- 18 = 470
- 19 = 4,7 k
- 20 = 470
- 21 = 33 k
- 22 = 1 k
- 23 = 18
- 24 = 18 MK3
- 25 = 10
- 26 = 560
- 27 = 100 potm.
- 28 = 220
- 29 = 330 N.T.C.
- 30 = 1,5 MK3
- 31 = 1,5 MK3
- 32 = 1 k 7W WW
- 33 = 120
- 34 = -
- 35 = 330
- 36 = 1 k PR37
- 37 = 10 k potm.
- 38 = 3,3 k
- 39 = 10 k
- 40 = 1,2 k
- 41 = 220
- 42 = 47
- 43 = 100
- 44 = 4,7 k
- 45 = CR
- 46 = 4,75
- 47 = 100 k
- 48 = 150 k MK3
- 49 = 220
- 50 = 47
- 51 = 47

CR = Calibration resistor

WW = Wire Wound

all non specified resistors are
of type MRS 25

C

- 1 = 0,22 µF X 250 V
- 2 = 2200 pF Y 400 V
- 3 = 0,15 µF X 250 V
- 4 = 2200 pF Y 400 V
- 5 = 330 µF 200 V
- 6 = 330 µF 200 V
- 7 = 100 µF 25 V
- 8 = 0,01 µF 500 V
- 9 = 2500 pF 250 V
- 10 = 680 µF 25 V
- 11 = 0,15 µF X 250 V
- 12 = 0,15 µF X 250 V
- 13 = 680 µF 25 V
- 14 = 0,22 µF 100 V
- 15 = 1000 pF 100 V
- 16 = 2200 pF 100 V
- 17 = 0,047 µF 250 V
- 18 = 2200 pF 100 V
- 19 = 2,2 µF 16 V
- 20 = 1 µF 40 V
- 21 = 1000 pF 100 V
- 22 = 1 µF 40 V
- 23 = 680 pF 1600 V
- 24 = -
- 25 = 0,33 µF 50 V
- 26 = 2200 pF 100 V
- 27 = 1 µF 40 V
- 28 = -
- 29 = 0,22 µF 100 V
- 30 = 0,22 µF 100 V
- 31 = 2500 pF 250 V
- 32 = 0,22 µF 100 V
- 33 = 680 µF 25 V
- 34 = 680 µF 25 V
- 35 = 0,22 µF 100 V
- 36 = -
- 37 = 2,2 µF 25 V
- 38 = 15 pF 500 V
- 39 = 0,22 µF 100 V
- 40 = 2,2 µF 25 V

Q = Transistor

- 1 = 2 N 2222 Sescosem
- 2 = 2 N 2907 Sescosem
- 3 = 2 N 2907 Sescosem
- 4 = -
- 5 = 2 N 2907 Sescosem
- 6 = MPSU 05 Motorola
- 7 = VN 66 AF Siliconix
- 8 = 2 N 2222 Sescosem
- 9 = BUX 48 Sescosem
- 10 = 2 N 2907 Sescosem

- MRS 25 = metal film 0,6 W 1%
- MK 3 = " " 0,6 W 1%
- PR 37 = " " 1,6 W 5%

R10, R46	12/91	Ur.	Title: Part list
C 2, 4, 15, 16, 18, 21, 25	4-87	Ur.	75 S15 - 15
C 25	12/91	Ur.	Date: 3 - '81
Modifications	Date	App.	delta elektronika bv

δ

D			
1 = VJ 1048	VARO		
2 = BYV 26D	Philips		
3 = BYV 26D	Philips		
4 = BYV 26D	Philips		
5 = ZPY 6,2	ITT		
6 = BYV 32/100	Philips		
7 = -			
8 = ZPY 18	ITT		
9 = BT 151/500R	Philips		
10 = G 314 N4	Philips		
11 = ZPD 5,6	ITT		
12 = ZPD 6,8	ITT		
13 = 1 N 4148	TI		
14 = 1 N 4148	TI		
15 = 1 N 4148	TI		
16 = ZPD 6,2	ITT		
17 = BYV 26D	Philips		
18 = BYV 26D	Philips		
19 = BYV 26D	Philips		
20 = -			
21 = -			
22 = TL 431 ILP	TI		
23 = TL 431 ILP	TI		
24 = BYV 32/100	Philips		
25 = -			
26 = BYV 26D	Philips		
27 = ZPU 150	ITT		
28 = 1 N 4148	TI		
29 = 1 N 5818	Motorola		

L			
1 = L 165		Delta	
2 = L 166		Delta	
3 = XL344		Delta	
4 = L 170		Delta	
5 = 2,2 μ H		Secre	

IC			
1 = HEF 4049		Philips	
2 = TLP 580		ITT	


F			
1 = 2 A slow			
2 = 800 mA quick			

Ts = Thermo switch		Uchiya	
	UP 62	80 $^{\circ}$ C	5%

T 1 = T 164		Delta	
-------------	--	-------	--

L3 = XL344	4-91	Vr.	Title	Part list
D10 rd = grn.	10-89	Vr.	75 S 15 - 15	
D6,7,24,25	4-87	Vr.	Date	3 - '81
Modifications	Date	App	delta elektronika bv	




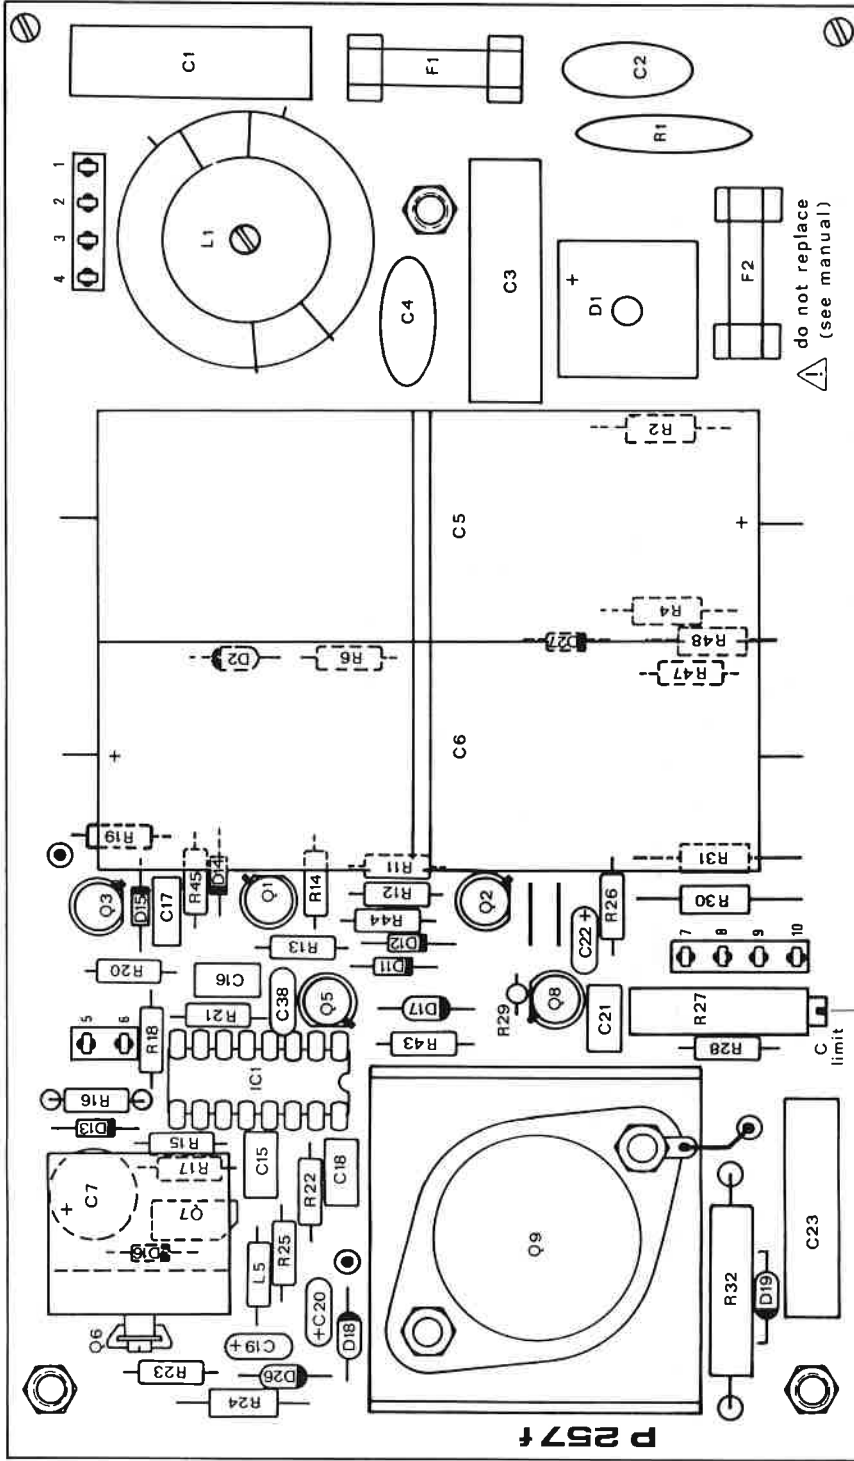

Do not replace F2
 F2 blows when Q9 gets defective
 In that case replacement of F2 can
 also damage other components


Current limit adj.
 factory adjusted
 and sealed
 Warranty lapses
 if seal is broken

P257	Ur.	10-89	Title:	PC board
P257e	Ur.	4-87		75 S 15 - 15
(C 2, 4, 15, 16, 18, 21)			Date:	3-'81
Modifications	Date	App	delta elektronika bv	

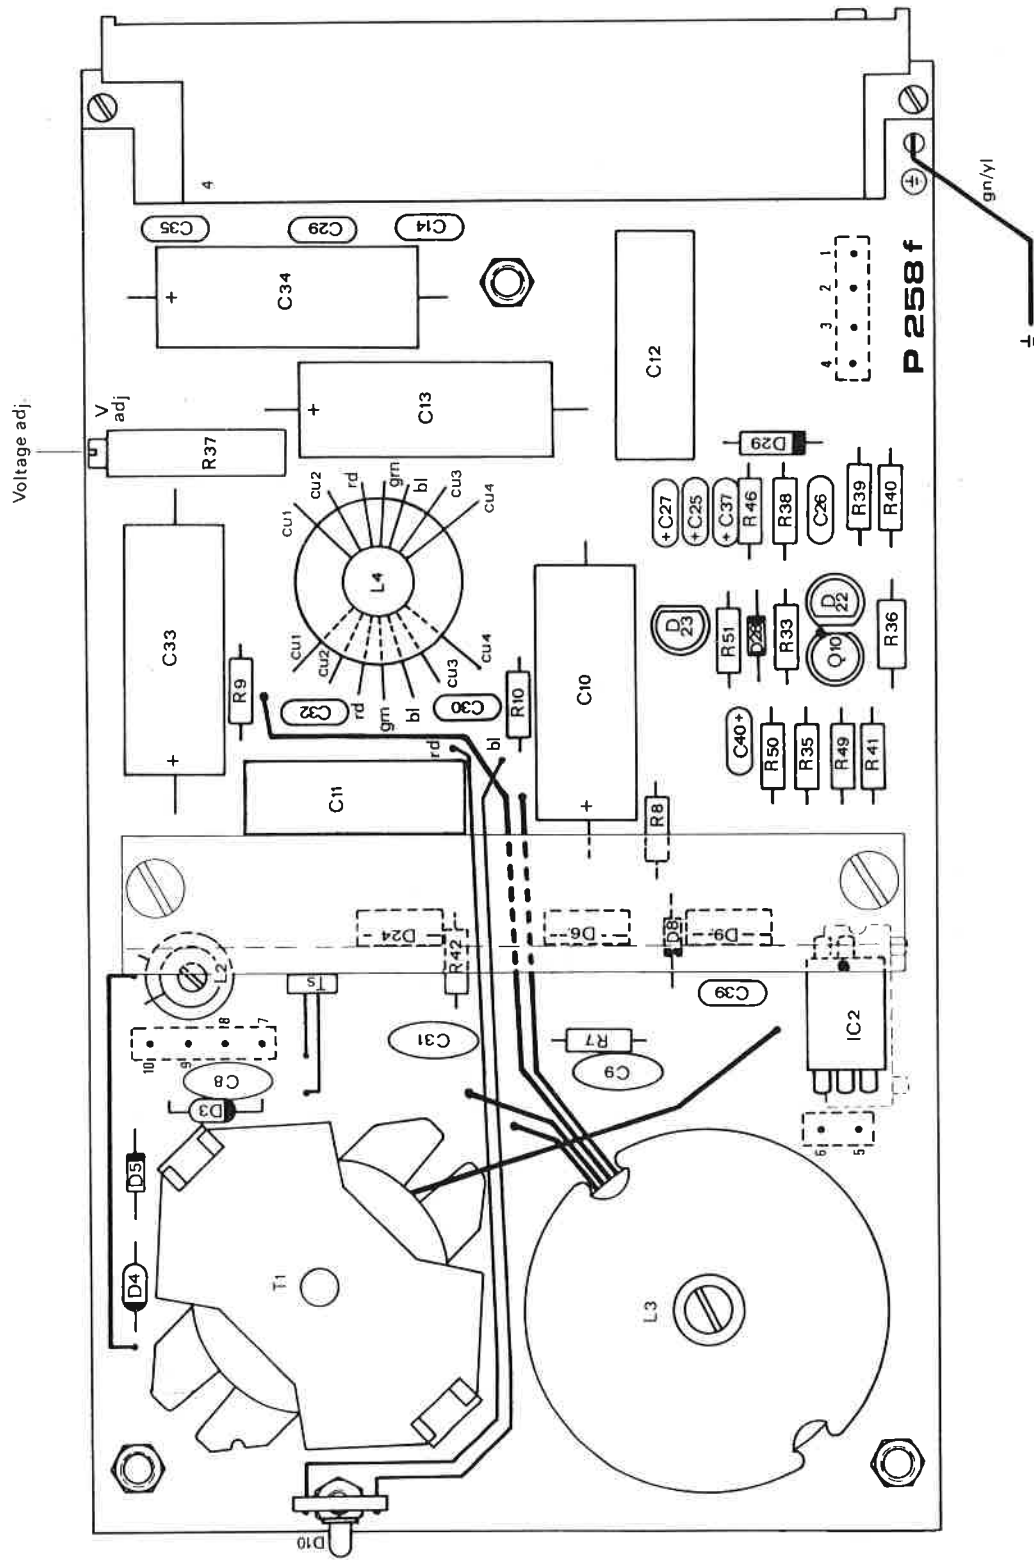

P258f	10-89	Ur.	Title: PC board
P268c (D6,7,24,25,4-87)	4-87	Ur.	75 S 15 - 15
C25, 26, 37		Date:	3-'81
Modifications	Date	App	delta elektronika bv



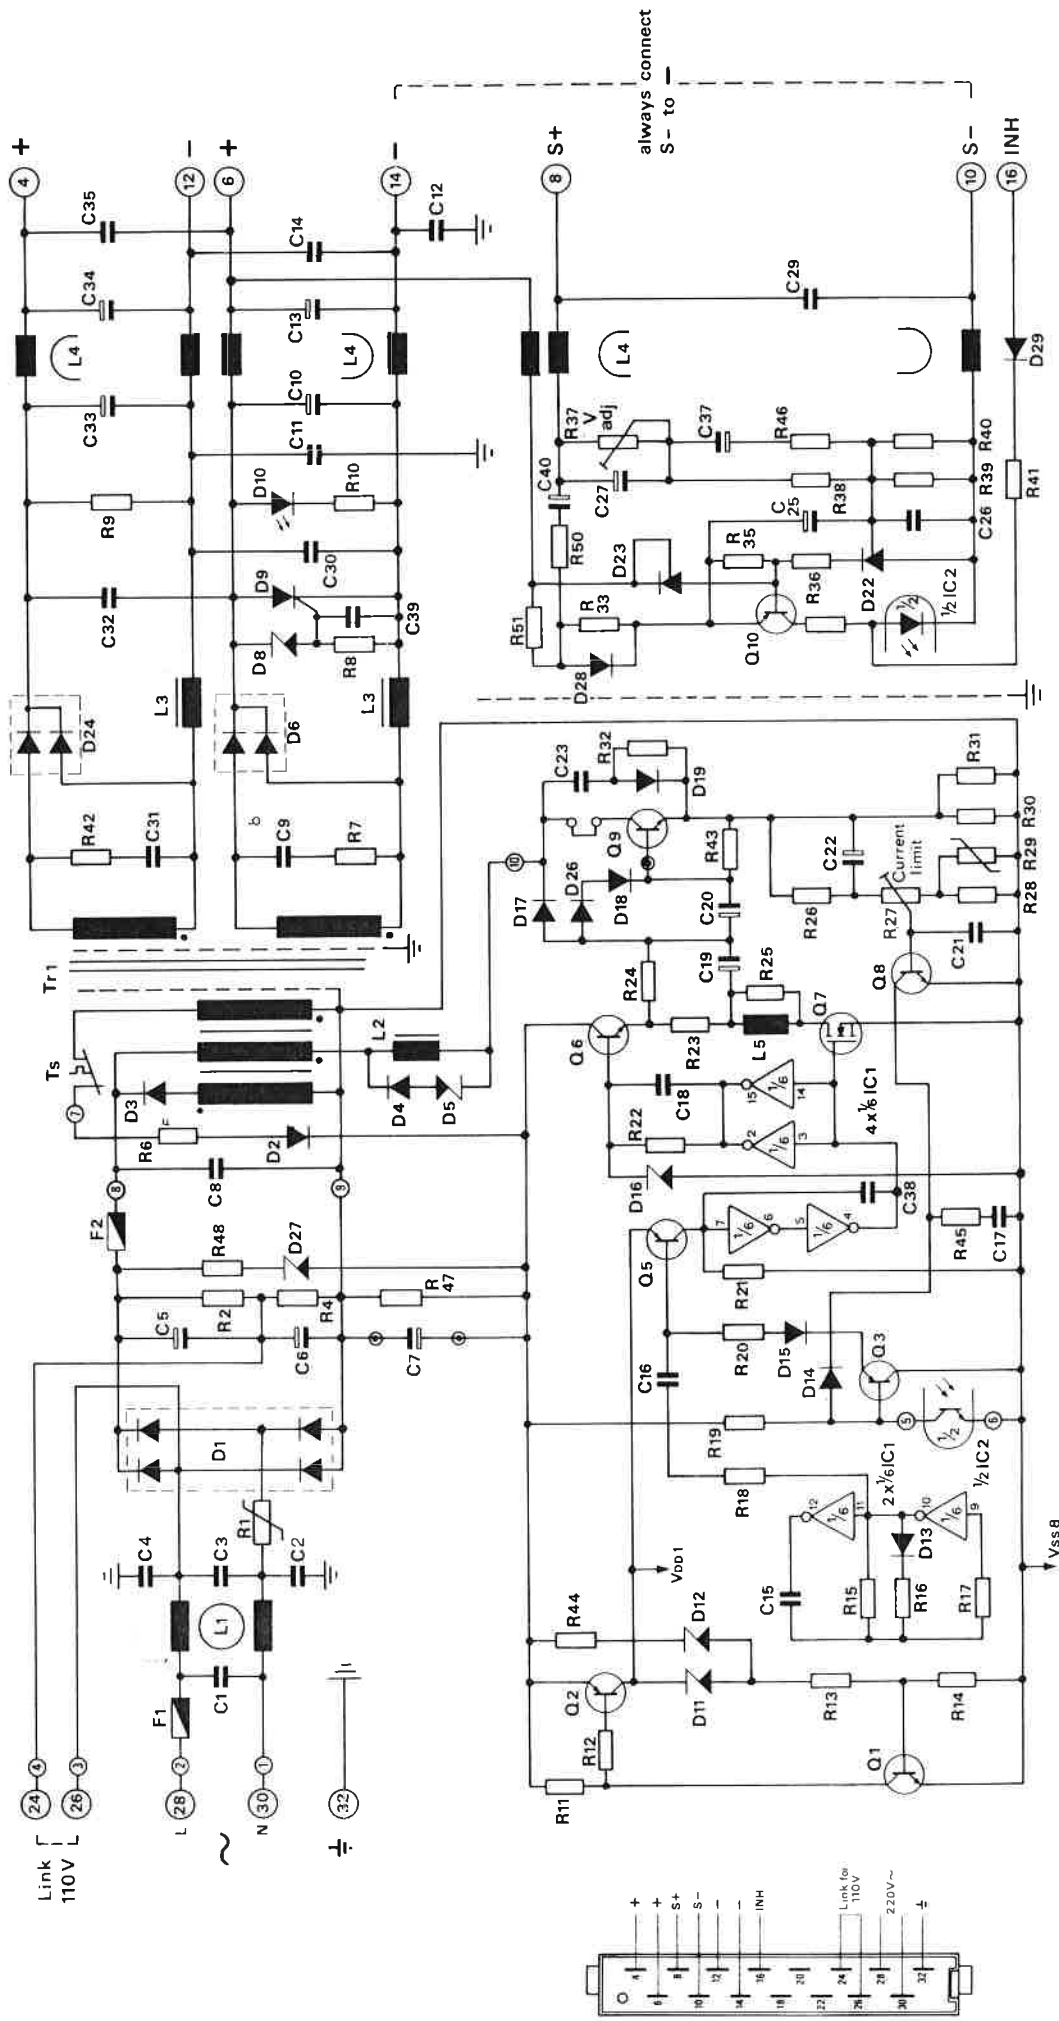

Logic inhibit function : Logic 1 between INH (pin 16) and S- (pin 10) inhibits output

Logic 0 between INH (pin 16) and S- (pin 10) enables output

D 24, 6	C 26, 37	4.87	U _r	Title: Circuit diagram
C 24, 28	36, 40	5.84	U _r	75 S 15 - 15
R 49, 50, 51	D 28, 29	5.84	U _r	Date: 3-81
Modifications				Date App
				delta elektronika bv

